

Data Extraction for User Profile Management based on behavior

Cherrat Loubna, Ezziyyani Mostafa
Mathematic and Application Laboratory, FSTT
Tangier, Morocco
cherratloubna2@gmail.com

EL Mouden Annas, Hassar Mohammed
Mathematic and Application Laboratory, FSTT
Tangier, Morocco
ezziyyani@gmail.com

Abstract— Despite the large and spectacular development in the field of vehicle safety, particularly in the context of driver safety needs, solutions remain insufficient and independent. In this paper, we propose a new system that has been dubbed 3SD "Security and Surveillance System for Drivers". It is a multifunction system as a complete package based on intelligent sensors and cameras that constantly monitor the vehicle's environment and the behavior of the driver to detect early so potentially dangerous situations. In critical driving situations, these systems alert and actively help the driver; if necessary, they automatically intervene to prevent or mitigate the consequences of an accident. The package proposed includes an application comprising a set of pre-registered drivers in a specialized social network interconnected to a geolocation server for distributed real-time sharing of information and data useful for security and traffic. The system is founded mainly on learning systems for face recognition based on advanced algorithms "Viola and Jones method" and "PCA method" as well as management of drivers profiles based on preferences to provide the following features: early detection of sleep, unconsciousness and poor driver behavior, security against theft of vehicles, driver comfort and control and sharing of traffic information in real time between the conductors.

Keywords-component; Security; Surveillance; Detection; Behavior; mobile communication; geolocation; Web Service control systems.

I. INTRODUCTION

Currently, many of the vehicles have a computer security system; something that has shown its importance and its effectiveness. For this, the improvement and the generalization of computerization is a necessity much sought. Our contribution in this area is to use data extraction for user profile management based on behavior for developing a security and surveillance system for drivers. At fact, the user profile and the behavior represent the information about an individual user that is essential for a system to provide the adaptation effect.

The remainder of this paper is organized as follows: in the first part, we present the general context of our 3SD project entitled "Security and Surveillance System for Drivers". Then, the second part presents the analysis and

design of the project, beginning with defining the main features. Then, in the third part, we present the platform with an explanation of the different components that we have developed. Finally, we describe the system and performed services.

II. BACKGROUND OF THE PROJECT

Fatigue, sleep and poor driving behavior can be described as a progressive decline in mental and physical alertness that leads to drowsiness and sleep. The degree of fatigue is problematic from the moment it compromises the ability of a driver to perform tasks that require attention and judgment, and that appeal to his reflexes. In general, the main known causes of fatigue at the wheel are:

- Linked to the driver: The circadian rhythms (biological clock), the state of health (physical and mental), the quantity and quality of sleep, wake time, food, fitness, family life and age, etc.
- Work related: corporate culture, time of day, length of the period of work, lack of adequate rest periods, rotating shifts, night work and the importance of mental workload or physics, etc.
- Related to the environment: The ergonomics of the vehicle, the type of travel, road and weather conditions, availability of rest areas, the monotony of the road and environmental stress (heat, noise and vibration), etc.

The consequences of fatigue greatly impair driving performance. Indeed, there is a strong connection between fatigue and errors that lead to an accident: Fatigue increases the reaction time, decreases awareness, impairs judgment, impairs memory, reduces the field of view and increases risk of drowsiness and sleep. To solve this problem, the proposed solutions are generally limited to the analysis of the particular facts of certain behaviors, for example, if the driver no longer turns the steering wheel for a short time and then makes a sharp correction trajectory. In this paper, we propose the generalization of the solutions on all possible pre behaviors that can often be a sign of deconcentration and increased fatigue based on facial expressions or movements. The warning device for the driver that we propose is an

intelligent system that monitors all the bad driving behavior. In case of abnormal conduct or detection of fatigue expressions on the face of the driver, it will be alerted by a signal and a message on the screen to recommend to pause or by performing certain actions in order to attract the driver's intention namely; automatic opening of windows, increasing the volume or change the radio channel, change the layout or the vibration of the seat or the mandatory stop in the next rest area by the automatic pump shutdown injection fueled by calculating the required depending on the remaining distance etc.

Another problem that we will discuss for an integrated solution is the protection of vehicles against theft. Car theft is a global problem and very expensive. Indeed, several solutions are available but are still very limited and insufficient against theft crime that continues to increase. In this perspective, we propose an innovative solution based on the detection of persons authorized to drive the vehicle.

The third category of problems related to the safety of drivers arises in the context of safety in the road. It is the sharing of information between the conductors. Information sharing between drivers via a dedicated social network is an effective way to road safety and to reduce the accident rate.

Thereafter, we will propose a detailed study of an adequate and effective solution to these three problematic in a single package consisting of:

- An embedded system in the vehicle with three cameras and special sensors for security against theft, self-regulation of the vehicle devices to the profile of the driver and for the detection and control of sleep and bad behavior.
- An application to oversee the security process through a web service.
- A social network for the dissemination and sharing of information between the drivers in real time.
- A Mobile application, used by the police officers that offers the ability to view alerts sleep or theft of vehicles in order to arrest the suspects.

III. FUNCTIONAL STUDY OF THE 3SD PHYSICAL COMPONENTS

The system services that we offer are mainly based on the direct control of the driver. Therefore, the automatic identification of the driver and those exact behaviors and knowledge of the state of the external environment via high-resolution cameras are the basic key for our solution. To achieve this objective, the device, which we propose, has three cameras: the first focused on the driver to record and filter images on the driver's face in a local database. The second camera allows controlling the channel outputs through viewing the road during the traffic in order to maintain the path of the vehicle according to the markings and warn the driver in case of involuntary crossing. The third camera is used to record the state of the external environment for possible communication and sharing with a network of drivers all the information on road conditions, climate etc....

To meet safety requirements, the 3SD system analyzes these images using the Viola and Jones algorithm considered as one of the most important methods for object detection and as a method of supervised learning. Secondly we will use the principal component analysis (PCA). In addition we use emerging technologies in mobile communication, geolocation, Web Service and control systems. Another component in the integrated 3SD device allows detecting the accident via the automatic calculates the degree of shock and degradation of speed. This component (Accelerometer) which is associated with a location-based map is used to communicate the geographical position of the accident in real time.

IV. VIOLA AND JONES ALGORITHM

Viola and Jones [3] is a method of object detection in a digital image, proposed by researchers Paul Viola and Michael Jones in 2001. It is one of the first methods that can effectively detect objects in an image on real-time [1]. Originally invented to detect faces, it may also be used to detect other types of objects such as cars or aircraft. The Viola and Jones method is one of the best known and most widely used methods, especially for face detection and people detection.

A. Method Principle

Viola and Jones method is an approach based on appearance which consists in browse the entire image by calculating a number of characteristics in rectangular areas that overlap. It has the peculiarity to use very simple but very many features. One innovation of the method is the introduction of integral images that allow rapid calculation of these characteristics. A second important innovation is the selection of these characteristics by boosting and interpreting the features as classifiers. Finally, the method proposes an architecture for combining the boosted classifiers in a cascade process, which provides a net gain in detection time. It is divided into two steps: a step of learning of based on a large number of positive examples (that is to say, the objects of interest, such as faces) and negative examples, and a detection phase by applying this classifier to unknown images.

B. Characteristics

Viola and Jones method proposed to use the characteristics, that is to say, a concise and informative representation, calculated from the values of the pixels. Viola and Jones method define very simple features, the Haar-like features, which are calculated by the difference of the sums of two pixels or more adjacent rectangular regions. The figure below shows examples of characteristics proposed by Viola and Jones method to 2, 3 or 4 rectangles, in which the amount of dark pixels is subtracted from the sum of the white pixels.




Figure 1. HaarTraining Rectangles

C. Selection of characteristic by boosting method

The second key element in the Viola and Jones method is the use of a boosting method to select the best characteristics. Boosting is a principle which is to build a "strong" classifier from a weighted combination of 'weak' classifiers, that is to say, giving on average a better answer than a random draw. Viola and Jones method adapt this principle by equating a feature to a weak classifier, building a weak classifier which uses only one characteristic. Learning the weak classifier is then to find the threshold value of the characteristic to better separate the positive examples of negative examples. The classifier is then reduced to a couple (characteristic threshold).

This scheme is an illustration of the architecture of the cascade: windows are sequentially processed by the classifiers, and discarded immediately if the answer is negative (F).

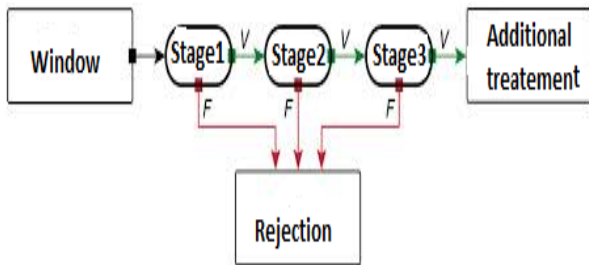


Figure 2. Boosting method

V. LEARNING

Learning is performed on a very wide range of positive images (that is to say containing the object) and negative (not containing the object). Thousands of examples are usually required. This training includes:

- The calculation of pseudo-Haar features [7] on the positive and negative examples.
- The drive of the cascade to each stage of the cascade, a strong classifier is trained by AdaBoost. It is built up by successively adding weak classifiers trained on one characteristic, to obtain consistent performance to the detection rate and false alarm for the desired floor.

The algorithm uses the data stored in an XML file and allows you to decide how to classify each image location [14].

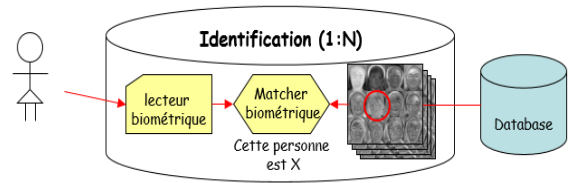


Figure 3. How PCA works

A. The Face Recognition (PCA)

The principal component analysis (PCA) [5][6] was invented in 1901 by Karl Pearson. Now, it is mainly used as a tool in the analysis of data and for the production of predictive models. PCA is a mathematical procedure which uses orthogonal transformation to convert a set of observations of correlated variables to a set of values of linearly uncorrelated variables called principal components. The number of principal components is less than or equal to the number of original variables. This transformation is defined such that the first principal component is the largest possible variance and each succeeding component in turn the highest possible variance in the constraint it is orthogonal (ie, without correlation with the previous components). The main components are guaranteed to be independent only if the data set is normally distributed jointly. PCA is sensitive to the relative scaling of the initial variables. Depending on the area of application, it is also called the discrete Karhunen-Loeve (KLT), the Hotelling transform or Proper Orthogonal Decomposition (POD).

Generally, the main steps to follow are:

- Face detection[6].
- Extraction characteristics.
- Classification of facial images.

The characteristics considered are:

- Local features: eyes, nose, mouth.
- Global Properties: feature extraction of the entire image.



Figure 4. Global Features

B. Classification of facial images:

1) Feature extraction

PCA is a mathematical procedure that uses an orthogonal transformation to convert a set of possible values of a correlated variable M to a set of values of an uncorrelated

variable K called principal components (Eigenfaces)[16][17].

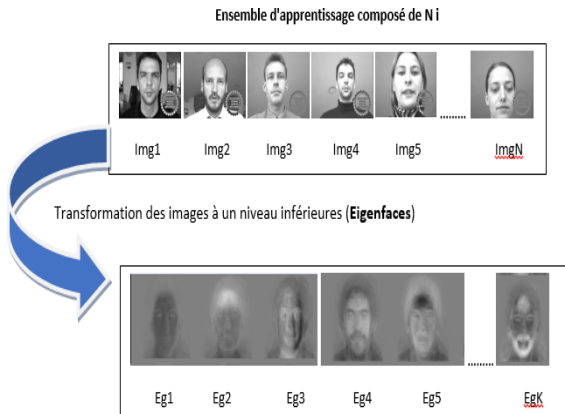


Figure 5. Image Classification

2) Classification by characteristics

This transformation is defined such that the first principal component has the most dominant characteristics of the data set and each succeeding component in turn has the following characteristics most dominant possible, under the constrained that it be not correlated with the previous components.

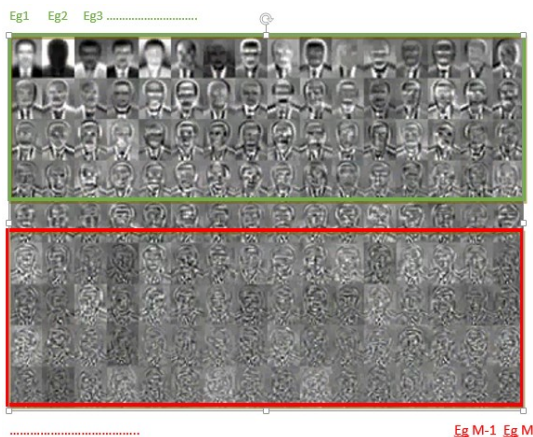


Figure 6. Classification by characteristics

VI. ANALYSIS AND SPECIFICATION

A. Main functionalities

This section is reserved the enumeration and the description of the different features that the system must ensure 3SD. After a thorough analysis, we came to identify the following features:

- Management of drivers, vehicles and accounts: Every vehicle owner can perform different managements to add, modify and delete vehicle users and accounts.

- Security against theft: Once the camera detects the face of a person who is not registered in the database, a message must be sent to informing the phone owner that a person is using his car so that it notifies the agency in order to locate the vehicle and report it to the police.



Figure 7. Security process against theft

- Sleep detection and driver behavior: To enable detection of the eyes, the vehicle speed must be greater than or equal to 80 km / h, in this case the camera starts to detect and classify the eyes [9] of drivers (open or closed). If the camera detects that the driver's eyes remain closed more than two seconds, here it begins the process of driver safety with a series of reactions (alarm, radio, electric windows, SMS, Geo location).

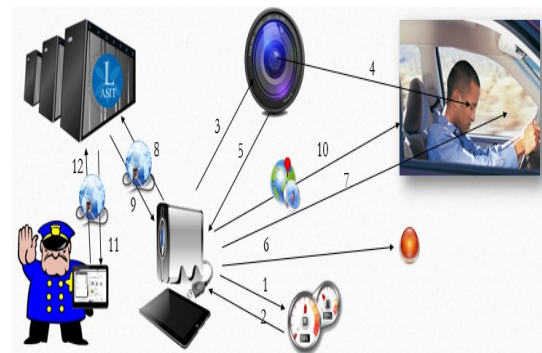


Figure 8. Sleep detection process

- Triggering alarm, radio and electric window: As mentioned earlier, if the camera detects that the driver's eyes remain closed more than 2 seconds, an alarm is initiated, the radio starts, and a power-window opens to wake the driver.
- Sending a text message to a sender: If the camera detects that the driver is in the process of sleep a 2nd time, an SMS is automatically sent to a member of his family (the phone number is preset) to inform that the driver is in danger.
- Sending alert to the server: If the camera detects that the driver is in the process of sleep a 3rd time, an alert should be sent to the remote server (Web Service) to enable the agency to recover the alert in order to locate and report the vehicle.

- **Geolocation vehicle:** After sending the alert, the web application locates the vehicle with a GPS and seeks the closest station to stop the vehicle or informs the nearest police roadblock to stop it.
- **Social Networks:** With our system, the driver can receive offers, notifications, additional services, as himself can share photos, events, alerts (in case of accidents), etc ... All this in a social network that brings together all subscribers of this service.
- **Geolocation alerts:** Vehicle locating and police roadblocks, continuing alerts and the ability to determine the shortest path of a vehicle at a police checkpoint.
- **Data management:** The management of subscribers (Add, Delete, Edit, View), font dam management, sales administration and management of alerts.
- **Black List:** This is a blacklist to record drivers who exceed five alarms, and are considered a danger to others on the road.

VII. FUNCTIONAL ARCHITECTURE OF THE SYSTEM

The functional architecture of the system, as shown in the figure below, consists of:

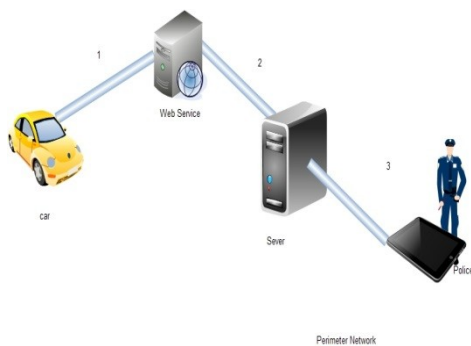


Figure 9. Application architecture

A. Server (web application)

It is a part used to receive alerts (security or sleeping) with all information regarding the alert type, geographic coordinates, owner information, in order to view this alert in a map to track in real time of this alert.

This section also allows the management of offers before sending them to the driver, as well as the management of subscribers and vehicles.

B. Desktop (Vehicle)

This part is used to locally treat the security process against theft and sleep of the driver to send an alert regardless of the type of the alert to the server to process it.

C. Web Service:

This part acts as the intermediary between the application of the system and the exchange of information (the case of

social network) and sending to server vehicle alerts and sending server alerts to police officers.

D. Mobile Application (Police Officer)

This part is used by police officers to receive alerts sent by the server and arrest suspects who pose a danger to the road.

E. Social Networks (Social Network):

In the context of new technologies that have emerged in recent years in the field of automobile manufacturing, we aim to create a complete system that changes the traditional view that says a vehicle is only used to move from a point A to point B. With our system, the driver can receive offers, notifications, additional services, share itself photos, event alerts (in case of accidents), etc. All this is in a social network that brings together all subscribers of this service.

F. Web application (the agency)

- **Management of alerts:** provides various monitoring operations and traffic alerts dam or the nearest police station, using algorithms known in the domain. For the location of alerts, we use the API V3 Google Maps.



Figure 10. Alert signaling process

- **Management of subscribers:** This is to ensure that the various managements CRUD (add, edit, delete, view) of subscribers for better control the flow of data alerts, offers and the social network.
- **Management of vehicles:** This task is to ensure the different managements CRUD (add, edit, delete, view) of vehicles to better control the flow of data and alerts subscribers.
- **Management of tenders:** This part covers the different management's offers that are to notify the subscriber of the latest services. These services include weather, road conditions and many other services.
- **Black List:** In order to properly control the alerts, we added the principle of Black List. Once an alert is repeated five times, the vehicle is automatically

considered as a danger on the road and is recorded in the black list.

G. Mobile Application (Police Officer)

- Management of alerts: It consists in receiving alerts with all the information on the vehicle, the driver and the real-time vehicle location. All this is in order to stop drivers that can cause traffic accidents.
- Locations of dams / stations: To ensure the real-time location of the police officers, a feature was added to our mobile application that detects the change of coordinates (latitude and longitude) and sends them to the server to update the level of agency

H. Web Service

The creation of a web service to ensure communication and data exchange between heterogeneous systems and applications in distributed environments. This is therefore a set of functionality exposed on the internet, by and for the application (the agency) or machines (Vehicles) without human intervention, and synchronously.

VIII. CLASS DIAGRAMS AND INTERFACES

Class diagrams play a central role in the project analysis and design of object-oriented application. They have a set of static model elements, content (internal structure) and their relationship to other elements.

A. Vehicle:

The following diagram shows the class diagram of our desktop application to manipulate the data.

B. Agency

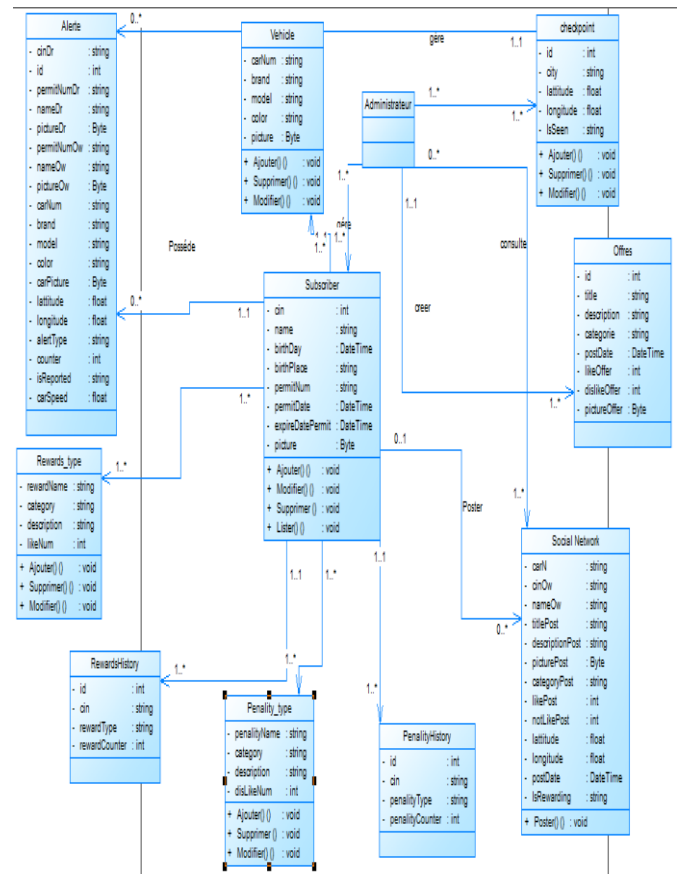


Figure 12. Class diagram for the management of agency

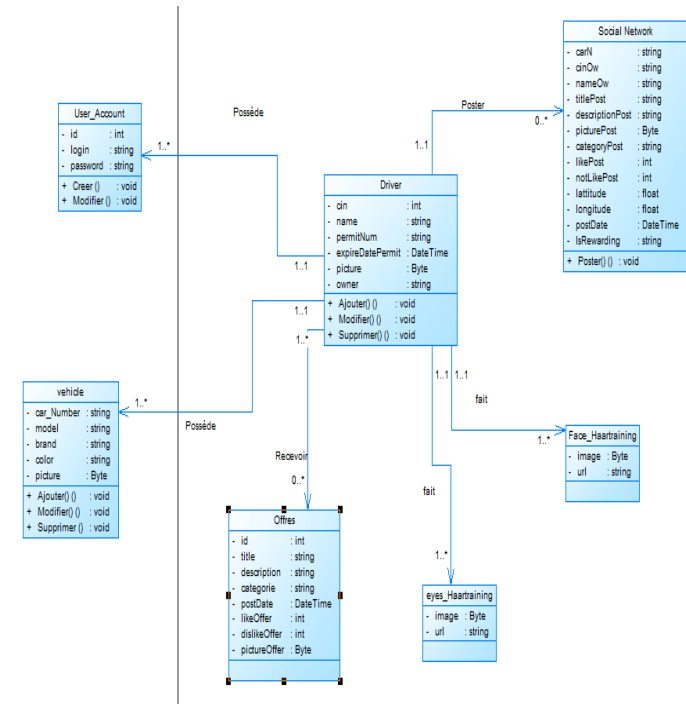


Figure 11. Class diagram for the management of vehicle

Figure 8.3 shows schematically the interface used for adding a new vehicle with all the necessary information. It also offers the ability to edit or delete the vehicle.



Figure 13. Interface for Vehicle Management

This interface (see Figure 14) is used for configuring the GSM modem and the phone number to which to send the SMS alerts.



Figure 14. Interface configuration

This interface (see Figure 15) deals with the process of sleep detection. For example, we can see from the figure above that the system detects and classifies the driver's eyes (Open / Closed) after reaching a speed of 80km / h.



Figure 15. Interface for the treatment of the process of sleep detection

Our web application provides the ability to view alerts (sleeping, Security) and geolocation in the map to determine the shortest route alerts to police roadblocks (Figure 16).

This application also offers the possibility of managing subscribers, vehicles and fonts dams and many other services which here the host interface:

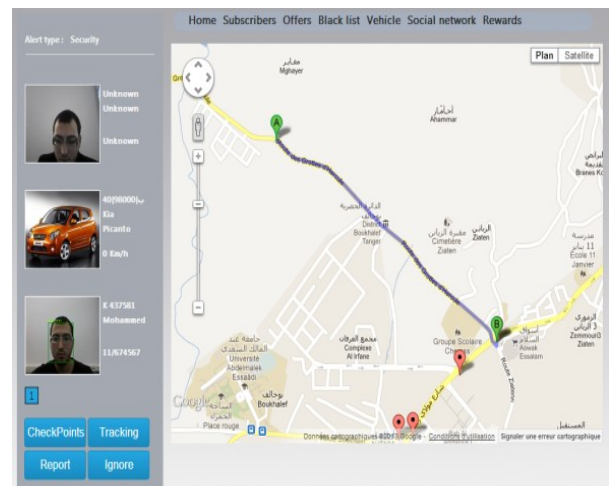


Figure 16. Main Interface of 3SD Web application

IX. CONCLUSION

We have presented in this article 3SD a new system that provides security and monitoring of drivers based on intelligent sensors and cameras that constantly monitor the vehicle's environment and driver behavior to detect a prematurely potentially dangerous situations and automatically intervene to prevent or mitigate the consequences of an accident. Our solution has proposed a package consisting of:

- An embedded system in the vehicle with three cameras and special sensors for security against theft, self regulation of the vehicle devices to the profile of the driver and for the detection and control of sleep and bad behavior.
- An application to oversee the security process through a web service.
- A social network for the dissemination and sharing of information between the drivers in real time.
- A Mobile application, used by the police officers that offer the ability to view alerts sleep or theft of vehicles.

To provide these features, the system is based mainly on learning systems for face recognition based on advanced algorithms "Viola and Jones method", "PC method" and management of driver profiles based on preference.

X. REFERENCES

- [1] H.Wang, L. B Zhou and Y. Ying, "A novel approach for real time eye state detection in fatigue awareness system", In IEEE Robotics Automation Mechatronics, pp 528-532 , 2010.
- [2] M. Rezaei and R. Klette, The enpeda Project, the University of Auckland Tamaki Innovation Campus, Auckland, New Zealand.
- [3] P. Viola and M. Jones, " Rapid object detection using a boosted cascade of simple features", In CVPR, pp. 511-518, 2001.
- [4] O. Langner, R. Dotsch, G. Bijlstra and D. H. J. Wigboldus, "Presentation and validation of the Radbound faces", Database Cognition Emotion, vol. 24, pp. 1377-1388 , 2010.
- [5] Y. Freund and R.E. Schapire, "Experiments with a new boosting algorithm", In Machine Learning, pp148-156, 1996.
- [6] O. Jesorsky, K. Kirchberg and R. Frischholz, "Robust face detection using the Hausdor distance", Audio Video-based Person Authentication, pp. 909-5, 2001.
- [7] A. Kasinski and A.Schmidt, "The architecture and performance of the face and eyes detection system based on the Haar cascade classifiers.J. Pattern Analysis Applications, pp.197-211, 2010.
- [8] K.C. Lee, J.Ho and D. Kriegman. "Acquiring linear subspaces for face recognition under variable lighting", IEEE Trans, Pattern Analysis Machine Intelligence, pp.684-698, 2005.
- [9] R. Lienhart, A. Kuranov and V. Pisarevsky, "Empirical analysis of detection cascades of boosted classifiers for rapid object detection". In Pattern Recognition, LNCS 2781, pp 297-304, 2003.
- [10] Z.Niu, S.Shan, S.Yan, X. Chen and W.Gao. "2D cascaded AdaBoost for eye localization", In ICPR, vol 2, pp 1216-1219, 2006.
- [11] P. Phillips, J. Wechsler, H. Huang and J. Rauss, "The FERET database and evaluation procedure for face recognition algorithms", Image Vision Computing, vol 16, pp.295-306, 1998.
- [12] P. Phillips, H. Moon, S. A. Rizvi and J. Rauss, "The FERET evaluation methodology for face recognition algorithms". IEEE Trans. Pattern Analysis Machine Intelligence, vol 22, pp.1090-1104, 2000.
- [13] PICS image database, University of Stirling, Psychology Department, picpsych.stir.ac.uk, 2011.
- [14] P. I. Wilson and J. Fernandez, "Facial feature detection using Haar classifiers", Computing Science, vol 21, pp.127-133 , 2006.
- [15] C. Zhang and Z. Zhang, "A survey of recent advances in face Detection", MSR-TR-2010-66, Microsoft Research , 2010.